

RANGE

PNEUMATIC VALVES SERIES K

PNEUMATIC OPERATED




- In case of product requested with ATEX certificate, add to the DK model the suffix EX

Symbol	Functions	Weight g	Model
	5/2 single stable position	98	DK 138010 (EX)

Symbol	Functions	Weight g	Model
	5/2 double stable positions	110	DK 138020 (EX)

DIMENSIONS

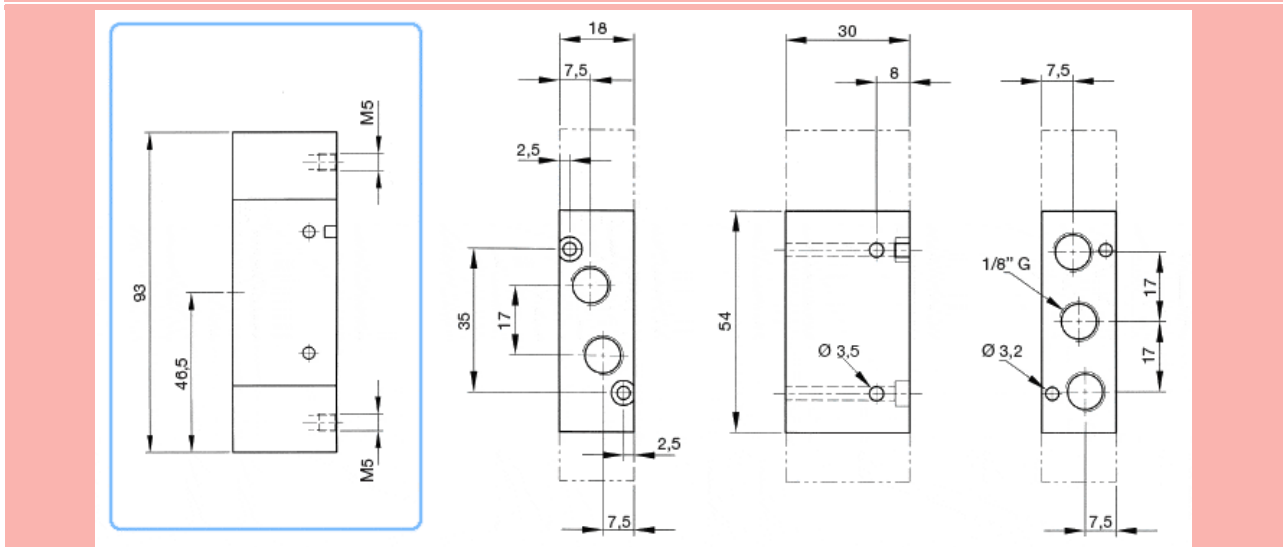


SOLENOID OPERATED VERSION F




- In case of product requested with ATEX certificate, add to the EK model the suffix EX

Symbol	Functions	Weight g	Model
	5/2 single stable position	145	EK 138010 (EX)

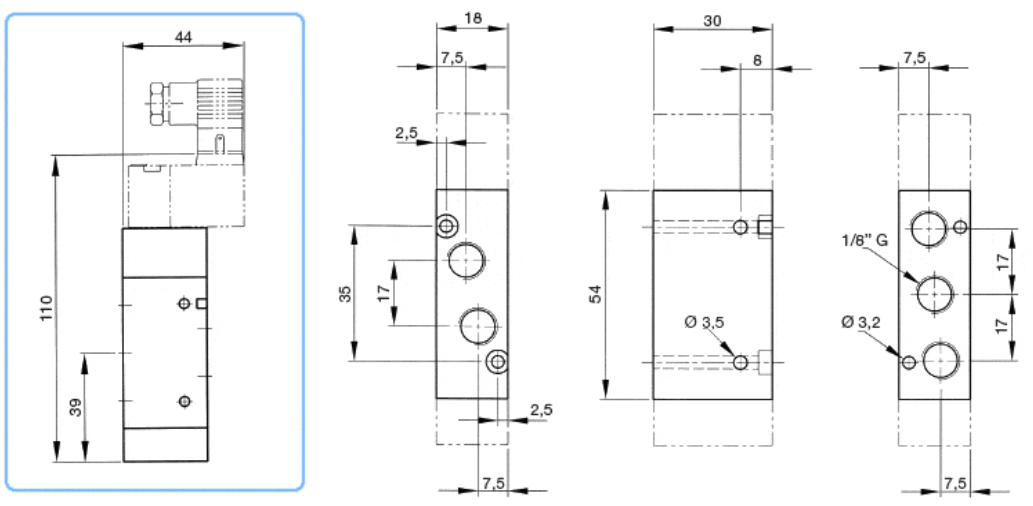

Symbol	Functions	Weight g	Model
	5/2 double stable positions	185	EK 138020 (EX)

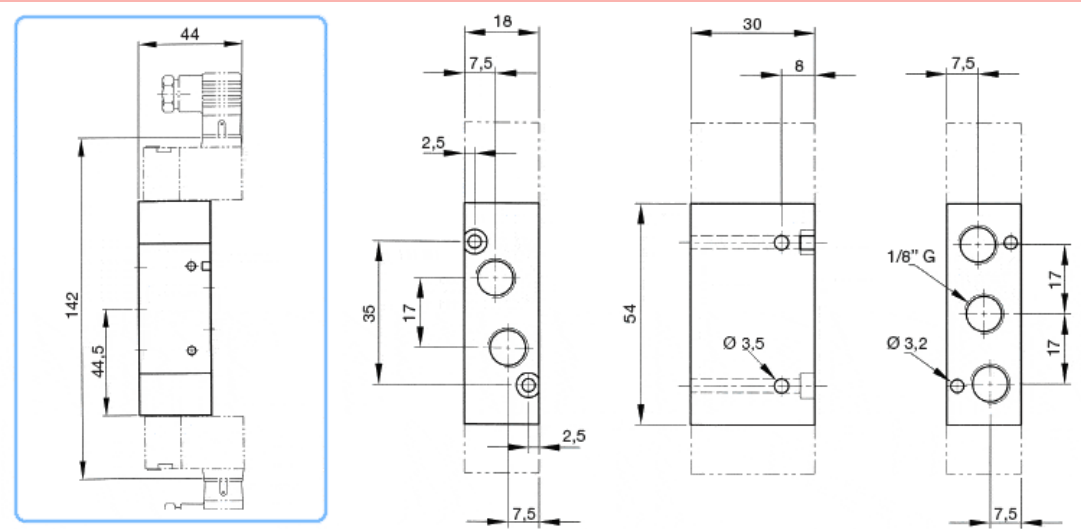


SOLENOID OPERATED VERSION ES



- In case of product requested with ATEX certificate, add to the EK model the suffix EX

Symbol	Functions	Weight g	Model
	5/2 single stable position	145	EK 138010 ES (EX)

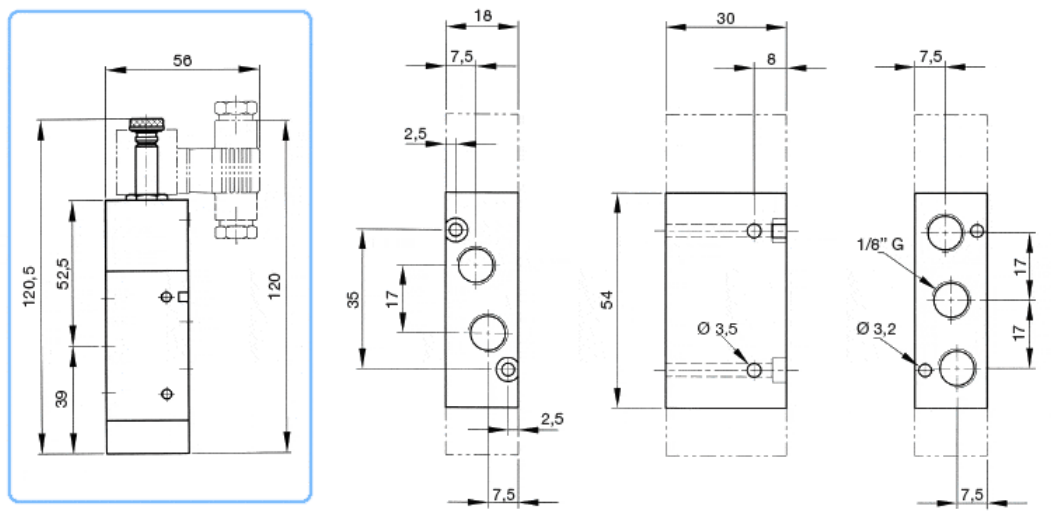

Symbol	Functions	Weight g	Model
	5/2 double stable positions	185	EK 138020 ES (EX)

