


BK5 SERIES ACCESSORIES

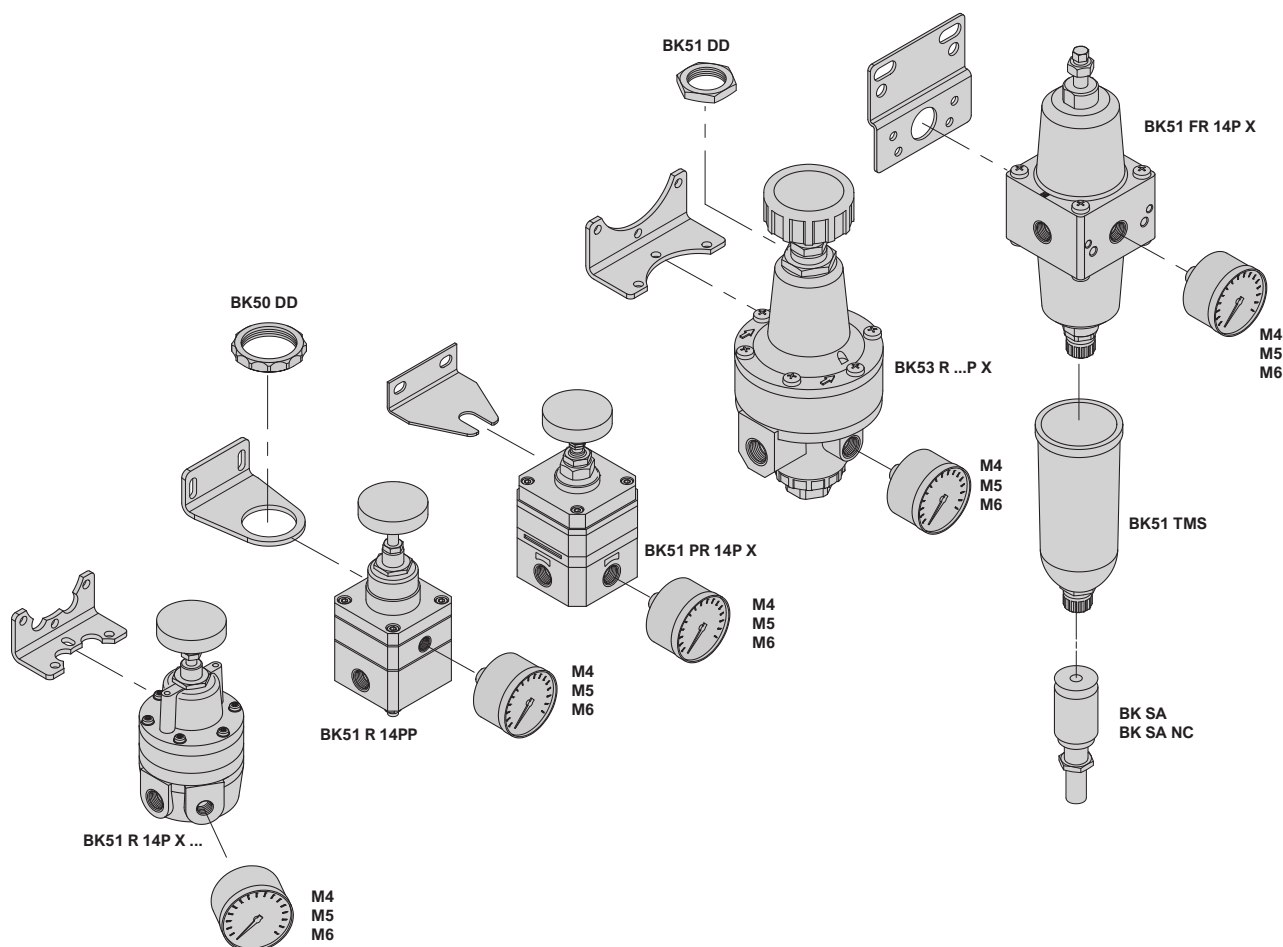


FASTENING BRACKET						FASTENING RING NUT	
For BK51 R 14P ...	For BK51 R 14PP	For BK51 PR 14P ...	For BK53 R ...	For BK51 FR 14P ...	For BK51 R 14PP	For BK53 R ...	
							
Page 4.3.05.20	Page 4.3.05.20	Page 4.3.05.20	Page 4.3.05.20	Page 4.3.05.21	-	-	
					BK50 DD	BK51 DD	
Galvanised steel					Black technopolymer	Galvanised steel	

METAL BOWL	AUTOMATIC CONDENSATE DRAIN		PRESSURE GAUGE			SPRING			
For BK51 FR 14P ...	Normally open	Normally closed	Dial Ø40	Dial Ø50	Dial Ø63	Size 1		Size 3	
									
Page 4.3.05.21	Page 4.3.05.21		Page 4.3.05.21			-		-	
BK51 TMS	BK SA	BK SA NC	M4	M5	M6	BK51 ML 03	0.5 ÷ 3 bar	BK53 ML 03	0.5 ÷ 3 bar
						BK51 ML 06	0.5 ÷ 6 bar	BK53 ML 06	0.5 ÷ 6 bar
						BK51 ML 16	0.5 ÷ 16 bar	BK53 ML 16	0.5 ÷ 16 bar
Metal and technopolymer body NBR gaskets	Components in PA66 and brass NBR gaskets		Plastic dial Brass threaded connection			Harmonic steel			

BK5 SERIES ACCESSORIES

ASSEMBLY BRACKET

For BK51 R 14P ...

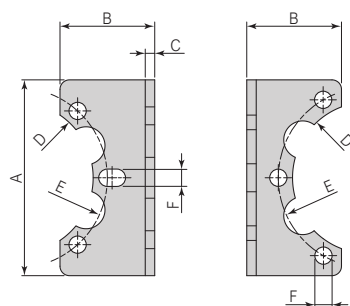


Size	Code	A	B	C	D	E	F
1		62	30	3	24	28.5	5.5

BK... SM ... / Galvanised steel bracket - 1 piece per pack

ASSEMBLY BRACKET

For BK51 R 14PP

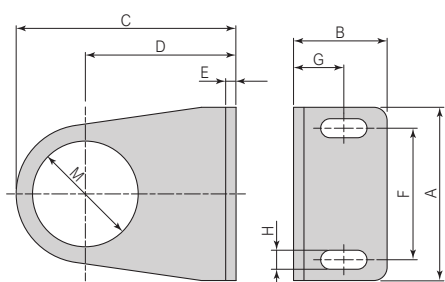


Size	Code	A	B	C	D	E	F	G	H	M
1		50	27	63.5	43.5	3	38	14.5	2.7	30.5

BK... SM ... / Galvanised steel bracket - 1 piece per pack

ASSEMBLY BRACKET

For BK51 PR 14P ...

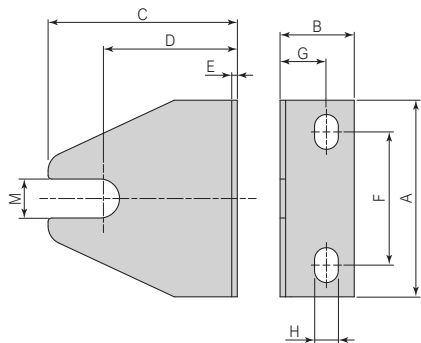


Size	Code	A	B	C	D	E	F	G	H	M
1		53	20	51	37	1.5	36	12.5	6.4	10.5

BK... SM ... / Galvanised steel bracket - 1 piece per pack

ASSEMBLY BRACKET

For BK53 R ...

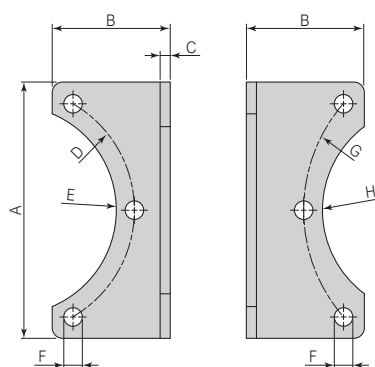


Size	Code	A	B	C	D	E	F	G	H
1		76	35	3	36.5	31	5.5	34	29.5

BK... SM ... / Galvanised steel bracket - 1 piece per pack




BK5 SERIES ACCESSORIES

ASSEMBLY BRACKET	Size	Code	A	B	C	D	E	F	G	H	I	L	M	N	O	P	Q
For BK51 R 14P ...	1		70	74	2	56.5	51	40	48	34	46	3.5	9	7	5.5	8.5	20

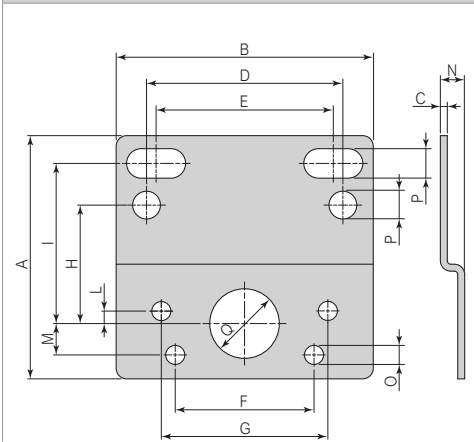

BK... SM ... / Galvanised steel bracket - 1 piece per pack


METAL BOWL	Size	Code	A	Ø B	Operating pressure	Operating temperature
For BK51 R 14P ...	1	BK51 TMS	112	40	0 ÷ 16 bar	0°C ÷ +50°C

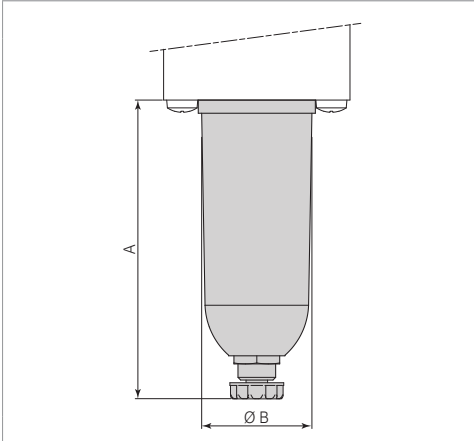

BK51 TMS / Metal and technopolymer body, NBR gaskets - 1 piece per pack

AUTOMATIC CONDENSATE DRAIN

	Technical characteristics	
Code	BK SA	BK SA NC
Size	1	1
Operation	Normally open. Opening of the discharge valve in the absence of pressure or when the tank is full	Normally closed. Opening of the discharge valve only upon filling of the tank.
Operating pressure	1.5 ÷ 16 bar	1.5 ÷ 16 bar
Operating temperature	0°C ÷ +50°C	

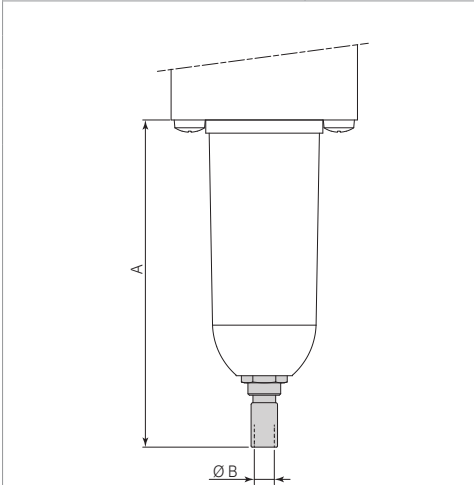


Dimensions			
Size	Code	A	Ø B
1	BK SA	108	Gas 1/8"
	BK SA NC		

BK SA - BK SA NC / Brass body, technopolymer float, NBR gaskets - 1 piece per pack

BK5 SERIES ACCESSORIES

PRESSURE GAUGES

Ø 40 - Ø 50 - Ø 63

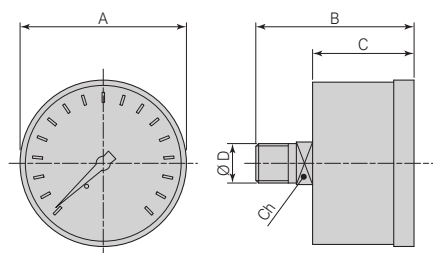

Size	Code	Scale	A	B	C	Ø D	Ch
Air treatment unit		bar					
Gas 1/4" Gas 1/2"	M 4 04	0 ÷ 4	40	37	24.5	Gas 1/8"	12
	M 4 06	0 ÷ 6					
	M 4 10	0 ÷ 10					
	M 4 12	0 ÷ 12					
Gas 1/4" Gas 1/2"	M 5 04	0 ÷ 4	50	46	27.5	Gas 1/8"	14
	M 5 10	0 ÷ 10					
	M 5 12	0 ÷ 12					
Gas 1"	M 6 04	0 ÷ 4	63	46	27.5	Gas 1/4"	14
	M 6 06	0 ÷ 6					
	M 6 10	0 ÷ 10					
	M 6 12	0 ÷ 12					

Black plastic body - clear, threaded connection / 1 piece per pack